


5.6M 붐 & 2.75M 암 & 아웃트리거/도저 하강

DX220W-7

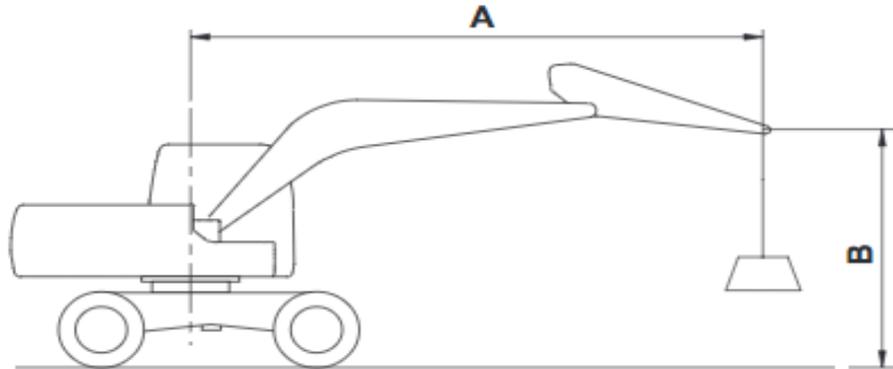

- Boom (STD) : 5.6 m (18' 4")
- Arm : 2.75 m (9' 0")
- Bucket : Without Bucket
- Counterweight : 3,200 kg (7,055 lb)
-  : Rating Over Front
-  : Rating Over Side or 360 degree
- Unit : 1,000 kg (1,000 lb)

Front : Outrigger, Rear : Dozer, Under Attach Down, Looking at the Front (STD)

DS2102254

그림 50


METRIC

1,000 kg

A (m) \ B (m)	3		4.5		6		7.5		MAX. REACH		A (m)
											
7.5									* 4.56	* 4.56	6.00
6					* 5.68	* 5.68			* 4.23	* 4.23	7.14
4.5			* 7.28	* 7.28	* 6.16	5.68	* 5.62	3.97	* 4.17	3.69	7.82
3			* 9.00	8.44	* 6.92	5.44	* 5.89	3.87	* 4.28	3.38	8.18
1.5			* 10.43	7.93	* 7.63	5.20	* 6.19	3.76	* 4.58	3.27	8.24
0			* 10.93	7.68	* 8.00	5.04	* 6.29	3.68	* 5.13	3.36	8.02
-1.5	* 11.41	* 11.41	* 10.53	7.62	* 7.82	4.98			* 5.86	3.68	7.50
-3	* 12.54	* 12.54	* 9.22	7.71	* 6.78	5.05			* 5.79	4.45	6.59
-4.5			* 6.30	* 6.30					* 5.68	* 5.68	4.86

5.6M 붐 & 2.75M 암 & 아웃트리거/도저 상승

DX220W-7

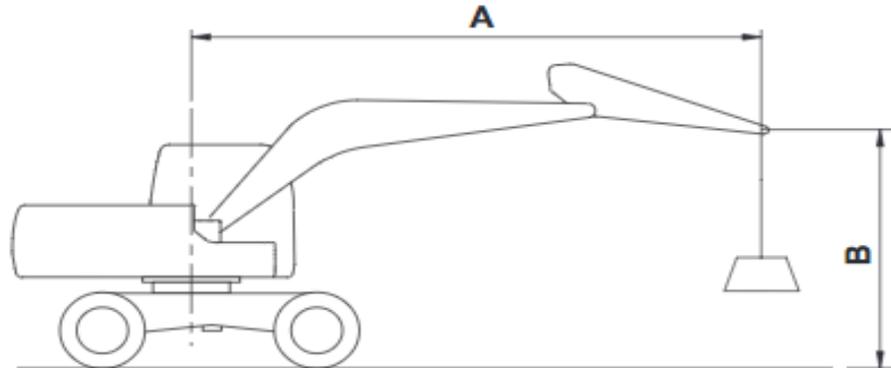

Front : Outrigger, Rear : Dozer, Under Attach Up, Looking at the Front (STD)

- Boom (STD) : 5.6 m (18' 4")
- Arm : 2.75 m (9' 0")
- Bucket : Without Bucket
- Counterweight : 3,200 kg (7,055 lb)
-  : Rating Over Front
-  : Rating Over Side or 360 degree
- Unit : 1,000 kg (1,000 lb)

DS2102255

그림 51

METRIC

1,000 kg

A (m) \ B (m)	3		4.5		6		7.5		MAX. REACH		A (m)
											
7.5									* 4.56	3.68	6.00
6					5.56	3.69			4.14	2.72	7.14
4.5			* 7.28	5.50	5.40	3.54	3.77	2.46	3.51	2.27	7.82
3			7.98	5.00	5.16	3.32	3.67	2.37	3.20	2.05	8.18
1.5			7.48	4.57	4.92	3.11	3.56	2.27	3.10	1.96	8.24
0			7.23	4.35	4.76	2.97	3.49	2.19	3.18	2.00	8.02
-1.5	* 11.41	7.84	7.17	4.30	4.71	2.92			3.48	2.19	7.50
-3	* 12.54	8.02	7.26	4.38	4.77	2.97			4.21	2.65	6.59
-4.5			* 6.30	4.61					* 5.68	4.16	4.86