


# 4.7M 붐 & 2.1M 암 & 도저 미장착

DX240LCR-7



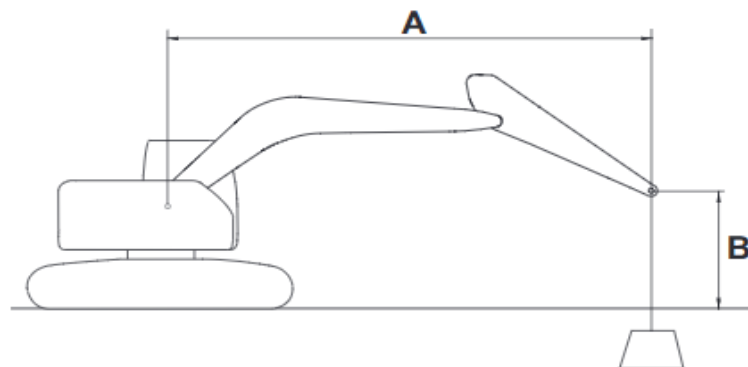











Track Width	: 2.99 m (9' 10")
Boom	: 4.7 m (15' 5")
Arm	: 2.1 m (6' 11")
Bucket	: Without Bucket
Counterweight	: 6,450 kg (14,220 lb)
Shoe	: 600 mm (24")
Dozer	: Without Dozer
	: Rating Over Front
	: Rating Over Side or 360 degree
Unit	: 1,000 kg (1,000 lb)

그림 11

DS2102482


## METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		MAX. REACH		A (m)
											
7.5									* 6.27	* 6.27	3.75
6					* 7.71	* 7.71			* 5.06	* 5.06	5.39
4.5			* 9.30	* 9.30	* 9.09	7.80	* 6.69	4.92	* 4.72	4.56	6.27
3					* 10.98	7.40	7.80	4.80	* 4.72	4.04	6.70
1.5					12.14	7.02	7.62	4.64	* 5.01	3.89	6.78
0			* 10.30	* 10.30	11.89	6.81	7.51	4.54	* 5.67	4.07	6.51
-1.5	* 9.93	* 9.93	* 17.46	13.06	11.87	6.79			* 7.09	4.73	5.85
-3			* 13.04	* 13.04	* 8.56	7.01			* 7.97	6.75	4.63

# 5.7M 붐 & 2.9M 암 & Dozer Up

DX240LCR-7

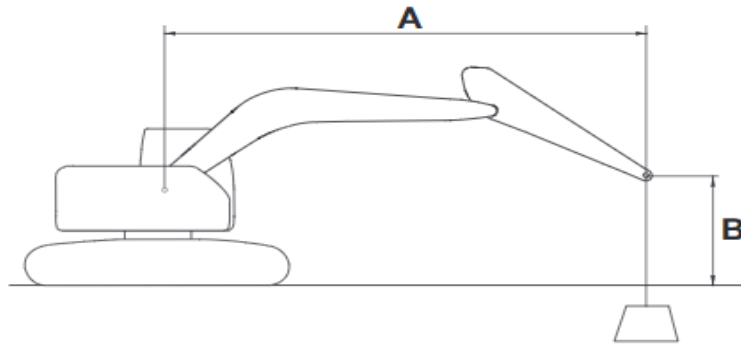

Track Width : 2.99 m (9' 10")  
 Boom : 5.7 m (18' 8")  
 Arm : 2.9 m (9' 6")  
 Bucket : Without Bucket  
 Counterweight : 6,450 kg (14,220 lb)  
 Shoe : 600 mm (24")  
 Dozer : Dozer Up (Rear)  
 : Rating Over Front  
 : Rating Over Side or 360 degree  
 Unit : 1,000 kg (1,000 lb)

그림 25

DS2102496


## METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		7.5		MAX. REACH		
													A (m)
9											* 5.67	* 5.67	4.34
7.5					* 6.22	* 6.22	* 5.35	* 5.35			* 4.80	* 4.80	6.19
6					* 6.67	* 6.67	* 6.34	5.45			* 4.52	3.93	7.28
4.5			* 10.68	* 10.68	* 8.11	* 8.11	* 6.95	5.26	* 6.19	3.69	* 4.50	3.34	7.95
3					* 10.14	7.60	* 7.87	4.99	6.11	3.58	* 4.66	3.05	8.29
1.5					* 11.86	7.06	8.32	4.73	5.97	3.45	* 5.02	2.95	8.36
0			* 6.59	* 6.59	* 12.57	6.78	8.12	4.55	5.87	3.36	5.23	3.01	8.14
-1.5	* 7.18	* 7.18	* 11.18	* 11.18	* 12.28	6.71	8.04	4.48	5.85	3.34	5.72	3.27	7.63
-3	* 11.98	* 11.98	* 15.13	13.20	* 11.02	6.79	8.10	4.53			6.86	3.90	6.75
-4.5			* 11.18	* 11.18	* 8.24	7.05					* 6.64	5.61	5.31

# 5.7M 붐 & 2.9M 암 & Dozer Down

DX240LCR-7

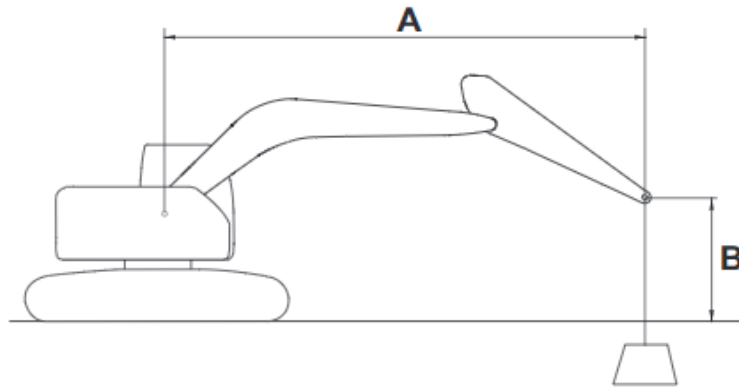















Track Width : 2.99 m (9' 10")  
 Boom : 5.7 m (18' 8")  
 Arm : 2.9 m (9' 6")  
 Bucket : Without Bucket  
 Counterweight : 6,450 kg (14,220 lb)  
 Shoe : 600 mm (24")  
 Dozer : Without Dozer  
 : Rating Over Front  
 : Rating Over Side or 360 degree  
 Unit : 1,000 kg (1,000 lb)

그림 27

DS2102498

## METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		7.5		MAX. REACH		A (m)
													
3											4.61	2.83	8.29
1.5									5.27	3.20	4.49	2.73	8.36
0			* 6.59	* 6.59	* 10.37	6.30	7.16	4.22	5.17	3.11	4.60	2.78	8.14
-1.5	* 7.18	* 7.18	* 11.18	* 11.18	* 10.11	6.23	7.09	4.15	5.15	3.09	5.04	3.03	7.63
-3	* 11.98	* 11.98	* 12.43	12.31	* 9.05	6.32	* 6.73	4.21			* 5.66	3.62	6.75
-4.5	* 12.54	* 12.54	* 9.11	* 9.11	* 6.72	6.58					* 5.39	5.23	5.31
-6	* 0.69	* 0.69									* 2.03	* 2.03	2.44