


## 5.7M HD붐 & 2.9M HD 암 & 도저 미장착

DX220LC-5(-5K/-5L)

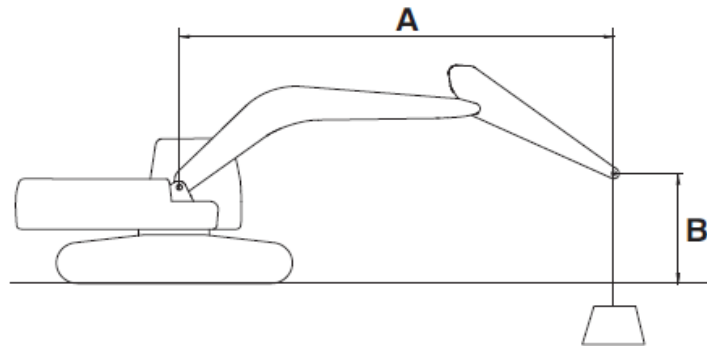

트랙 폭 : 2.99 m 표준 트랙  
 붐 : 5.7 m HD  
 암 : 2.9 m HD  
 버킷 : 장착 안함  
 카운터웨이트 : 4,300 kg  
 슈 : 600 mm  
 도저 : 장착 안함  
 : 전방 자세  
 : 측방 도는 360 선회 자세  
 단위 : 1,000 kg (1,000 lb)

그림 23

DS1801624


### METRIC

1,000 kg

A (m)	1.5		3		4.5		6		7.5		MAX. REACH		
													A (m)
7.5							* 5.00	* 5.00			* 4.50	* 4.50	6.19
6							* 5.31	* 5.31			* 3.94	3.8	7.35
4.5					* 6.81	* 6.81	* 5.83	5.21	* 5.36	3.63	* 3.89	3.23	8.01
3					* 8.58	7.57	* 6.64	4.94	5.41	3.51	* 4.00	2.95	8.35
1.5					* 10.14	7.02	7.39	4.67	5.27	3.39	* 4.27	2.85	8.42
0			* 6.28	* 6.28	* 10.86	6.74	7.19	4.49	5.17	3.3	4.54	2.91	8.21
-1.5	* 6.87	* 6.87	* 10.77	* 10.77	* 10.73	6.67	7.11	4.43	5.15	3.28	4.97	3.17	7.70
-3	* 11.60	* 11.60	* 13.57	13.2	* 9.75	6.75	7.17	4.48			* 5.96	3.79	6.83
-4.5			* 10.20	* 10.20	* 7.43	7.02					* 5.76	5.41	5.42

## 5.7M 붐 & 3.5M 암 & 도저 미장착

DX220LC-5(-5K/-5L)

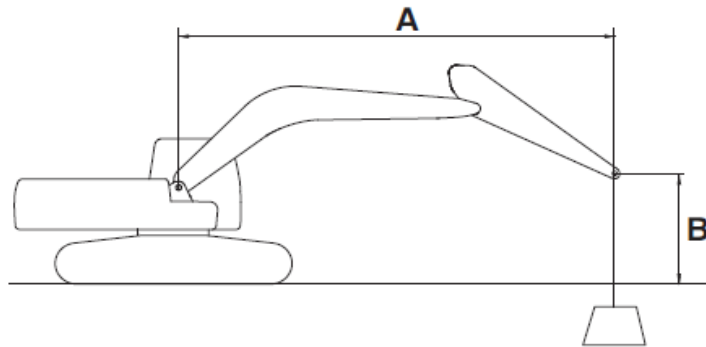

트랙 폭 : 2.99 m 표준 트랙  
 붐 : 5.7 m  
 암 : 3.5 m  
 버킷 : 장착 안함  
 카운터웨이트 : 4,300 kg  
 슈 : 600 mm  
 도저 : 장착 안함  
 : 전방 자세  
 : 측방 도는 360 선회 자세  
 단위 : 1,000 kg (1,000 lb)

그림 10

EX1503612


### METRIC

1,000 kg

A (m) \ B (m)	1.5		3		4.5		6		7.5		MAX. REACH		
													A (m)
7.5											* 3.57	* 3.57	6.92
6									* 4.37	3.80	* 3.38	* 3.38	7.92
4.5							* 5.34	* 5.34	* 4.99	3.73	* 3.36	2.98	8.54
3			* 11.90	* 11.90	* 7.81	* 7.81	* 6.21	5.06	* 5.40	3.59	* 3.47	2.74	8.86
1.5					* 9.60	7.21	* 7.12	4.77	5.33	3.44	* 3.70	2.64	8.92
0			* 7.47	* 7.47	* 10.67	6.82	7.25	4.55	5.19	3.32	* 4.11	2.68	8.72
-1.5	* 6.65	* 6.65	* 10.51	* 10.51	* 10.90	6.68	7.12	4.43	5.13	3.27	4.49	2.88	8.25
-3	* 10.27	* 10.27	* 14.83	13.03	* 10.29	6.70	7.12	4.44			5.23	3.34	7.44
-4.5	* 15.04	* 15.04	* 12.08	* 12.08	* 8.63	6.87	* 6.14	4.59			* 5.82	4.42	6.18

# 8.5M 붐 & 6.2M 암 & 도저 미장착



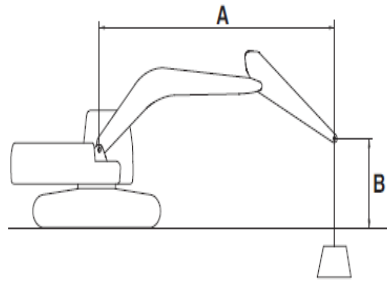









DX220LC-5(-5K/-5L)











트랙 폭 : 2.99 m 표준 트랙  
 붐 : 8.5 m  
 암 : 6.2 m  
 버켓 : 장착 안함  
 카운터웨이트 : 5,300 kg  
 슈 : 900 mm  
 도저 : 장착 안함  
 : 전방 자세  
 : 측방 도는 360 선회 자세  
 단위 : 1,000 kg (1,000 lb)

EX1503617

그림 15

METRIC													1,000 kg	
A (m) B (m)	1.5		3		4.5		6		7.5		9			
														
12														
10.5														
9														
7.5														
6														
4.5											* 2.99	* 2.99		
3			* 8.72	* 8.72	* 6.33	* 6.33	* 4.72	* 4.72	* 3.87	* 3.87	* 3.35	3.06		
1.5					* 7.98	7.42	* 5.63	5.05	* 4.42	3.71	* 3.71	2.85		
0			* 3.73	* 3.73	* 7.31	6.74	* 6.34	4.62	* 4.90	3.43	* 4.03	2.67		
-1.5	* 3.60	* 3.60	* 4.52	* 4.52	* 7.11	6.42	* 6.78	4.34	* 5.24	3.23	4.08	2.52		
-3	* 4.58	* 4.58	* 5.50	* 5.50	* 7.77	6.32	* 6.96	4.21	5.14	3.11	3.98	2.43		
-4.5	* 5.59	* 5.59	* 6.62	* 6.62	* 8.89	6.34	* 6.90	4.17	5.08	3.06	3.94	2.39		
-6	* 6.69	* 6.69	* 7.91	* 7.91	* 8.66	6.45	* 6.59	4.21	5.10	3.08	3.95	2.40		
-7.5	* 7.90	* 7.90	* 9.43	* 9.43	* 7.75	6.65	* 6.00	4.33	* 4.80	3.16	* 3.89	2.47		
-9			* 8.54	* 8.54	* 6.36	* 6.36	* 5.00	4.53	* 3.96	3.33				

METRIC													1,000 kg	
A (m) B (m)	10.5		12		13.5		MAX. REACH							
									A (m)					
12							* 0.96	* 0.96	9.86					
10.5	* 1.55	* 1.55					* 0.88	* 0.88	11.21					
9	* 2.11	* 2.11	* 1.10	* 1.10			* 0.83	* 0.83	12.22					
7.5	* 2.43	* 2.43	* 1.80	* 1.80			* 0.81	* 0.81	12.99					
6	* 2.57	* 2.57	* 2.24	2.04	* 0.85	* 0.85	* 0.80	* 0.80	13.53					
4.5	* 2.77	2.52	* 2.62	1.97	* 1.40	* 1.40	* 0.81	* 0.81	13.90					
3	* 3.00	2.38	* 2.77	1.89	* 1.72	1.50	* 0.84	* 0.84	14.10					
1.5	* 3.24	2.25	2.86	1.80	* 1.90	1.45	* 0.89	* 0.89	14.14					
0	3.39	2.12	2.77	1.72	* 1.88	1.40	* 0.95	* 0.95	14.02					
-1.5	3.28	2.02	2.71	1.65	* 1.54	1.37	* 1.05	* 1.05	13.73					
-3	3.21	1.96	2.66	1.61			* 1.18	* 1.18	13.26					
-4.5	3.18	1.93	2.66	1.61			* 1.38	* 1.38	12.60					
-6	3.21	1.95					* 1.69	* 1.69	11.71					
-7.5	* 2.38	2.04					* 2.23	2.04	10.53					
-9							* 3.02	2.66	8.94					